


Front Elevation and Profile Shown With Anti-Ligature TRV Kit & Shroud 9213-63 in Position



**Please note:** The grille size used in the IP3x anti-ligature radiator guard can inhibit the convection process. Therefore Contour cannot guarantee that the casing will not exceed a surface temperature of 43 degrees Centigrade.

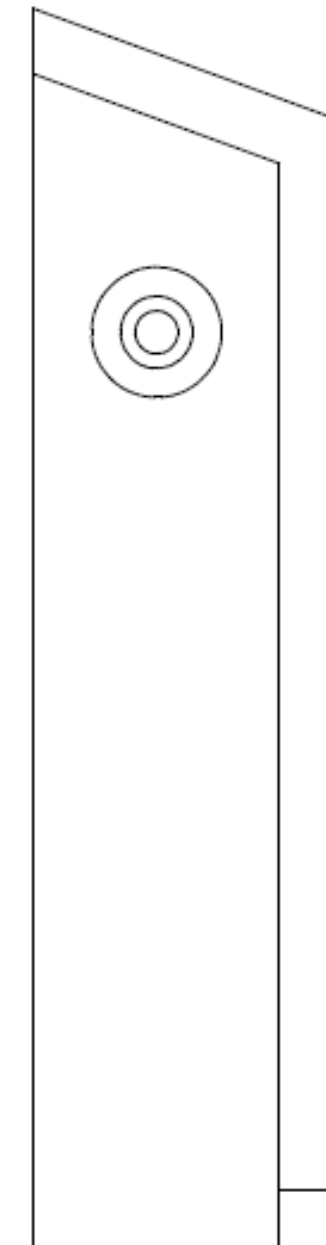

**Type:**  
DeepClean IP3x Compliant Anti-Ligature  
Grille Radiator Guard

**Model:**  
Gradient Top - Wall Mounted

**Manufacture:**  
1.5mm - 3mm Mild Steel (Depending on  
Installation Environment)  
10mm Radius Corners  
Full Height Front Access Door Available  
(Depending on Installation Environment -  
Pat. No. 2 410 544)  
IP3x Test (To BS EN 60529) Compliant  
Guard Grille, Incorporating 2mm holes at  
4mm Centres in Triangular Pitch  
Formation. Complies with Home Office  
Police Buildings Design Guide – Custody,  
July 2009, section PD3.02.14

**All Apertures:**  
Cut-Outs Programmed into Manufacture  
28mm Valve Knockouts Available

**Sizes:**  
Single Casing Length 500mm - 2000mm.  
Single Casing Height 480mm - 895mm  
Bespoke Solutions Available

**Finish:**  
Polyester PowderCoated RAL 9003  
Patented BioCote® Anti-Microbial Agent

**Valve Options:**  
Internal TRV Kit 9210-13  
External TRV Kit 9231-41  
Remote Sensing TRV Kit 7463-41  
Anti-Ligature TRV Kit & Shroud 9213-63  
"RotaRad" Rotating Valve Kit

**Fixings:**  
All Fixings Internal  
8mm PinHex Door Locks  
(Other Locks Also Available)

Contour Heating Products Ltd  
Stafford Park 10  
Telford  
TF3 3AT  
Tel: 01952 290498  
Email: sales@contourheating.co.uk  
Web: www.contourheating.co.uk